

RAYSAN

Flexible Barrier
POLYGUARD
PuffyGuard

THINK

FLEX

IBLE

3R COLUMN BARRIER

THIS COLUMN PROTECTION BARRIER IS DESIGNED FOR QUICK AND EASY INSTALLATION, OFFERING RELIABLE DEFENSE FOR STRUCTURAL COLUMNS IN AREAS WITH TRANSPORT AND LOADING TRAFFIC. IT PROVIDES ENHANCED RESISTANCE AGAINST HEAVY IMPACTS AT GROUND LEVEL. IT MINIMIZES DAMAGE FROM FREQUENT FORKLIFT IMPACTS, ENSURING THE LONGEVITY AND STABILITY OF COLUMNS. IDEAL FOR HIGH-TRAFFIC ENVIRONMENTS, IT ALSO HELPS MAINTAIN ORGANIZED AND CLEARLY DEFINED SPACES.





EXPERIENCE **UNPARALLELED STRENGTH** WITH OUR ADVANCED POLYMER, CRAFTED FROM A **PREMIUM BLEND** OF SOPHISTICATED POLYOLEFINS AND RUBBER ADDITIVES. THIS **EXCLUSIVE** COMPOSITION DELIVERS UNMATCHED DURABILITY AND **FLEXIBILITY**. OUR CUTTING-EDGE ENGINEERING PROCESS REORIENTS THE **MOLECULAR STRUCTURE** DURING MANUFACTURING, ENDOWING THE BARRIER WITH A UNIQUE **BUILT-IN MEMORY**. THIS INNOVATIVE FEATURE ENSURES THAT THE BARRIER **RECOVERS COMPLETELY** AFTER IMPACTS, MAINTAINING PEAK PERFORMANCE AND **RELIABILITY**.

STRONG AND LIGHTWEIGHT

Thanks to its unique chemical formula, our barrier surpasses steel barriers in both strength and weight. It is significantly lighter while maintaining its exceptional durability.

MODULAR

Thanks to its modular design, our barrier effortlessly adapts to the changing needs of your facility. This flexible solution is extremely easy to install, assemble, disassemble, relocate and organize.

NO CORROSION

Unlike steel barriers, our barriers are made of durable polymer materials, making them unaffected by environmental elements such as sunlight and rainwater.

NO PAINT AND MAINTENANCE NEEDED

Unlike Raysan's steel barriers that require regular painting and maintenance, our self-colored structure eliminates the need for these processes. Even if the barrier is scratched due to an impact, its surface retains its original color without any change.

ULTRAVIOLET RESISTANT

Our barriers are designed with exceptional resistance to UV radiation. Their chemical structure remains intact even after prolonged outdoor use, ensuring long-term durability.

ANTIBACTERIAL

Our barriers have an exceptional chemical formula that prevents them from having any chemical reaction with the substances they come into contact with.




ZETA	Post Dimension [D1]	Rail Dimension [D2]	Height Max [H]	Barrier Length MAX [L]	Impact Zone [Z]
	Ø160 mm	100 mm x 100 mm	1000 mm	Colum [C] + 400 mm	730 mm

TETA	Post Dimension [D1]	Rail Dimension [D2]	Height Max [H]	Barrier Length MAX [L]	Impact Zone [Z]
	Ø125 mm	50 mm x 100 mm	1000 mm	Colum [C] + 330 mm	730 mm



TECHNICAL DRAWING

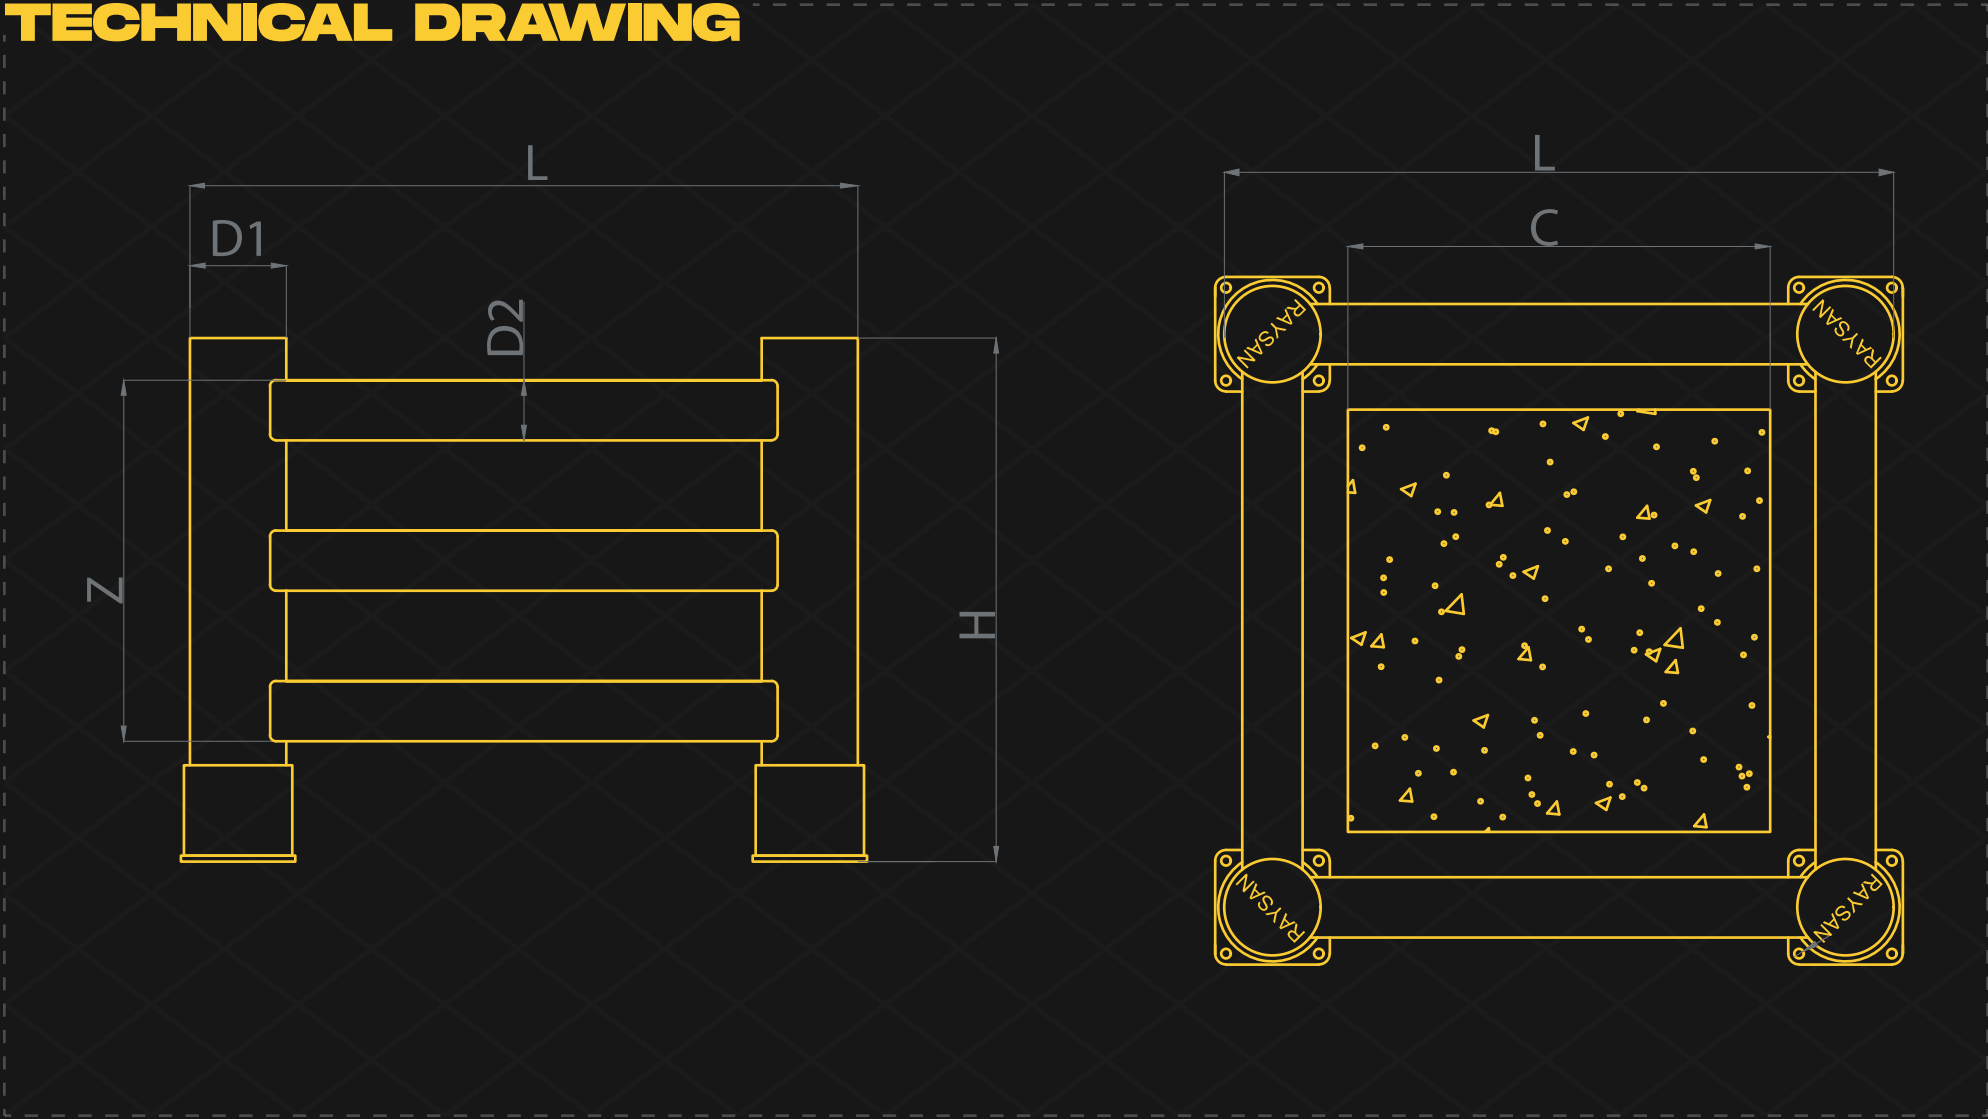

FIXING REQUIREMENTS

ELECTROSTATIC PAINT

STAINLESS STEEL

GALVANIZE


PULL OUT FORCE

↑ **16,4kN** ↑


GROUND

Concrete Quality	Minimum C25/30
Concrete Floor Plate Thickness [mm]	Minimum 150 mm
Water and Humidity	Steel [standart] : Suitable for dry indoor use only. Galvanize : Can be used in most outdoor environments. Stainless Steel : Ideal for outdoor use or environments with frequent exposure to water and humidity.

SUITABLE APPLICATION



BUILDING AND EQUIPMENT SAFEGUARDS



COLUMN PROTECTION SOLUTIONS



STANDART COLORS

RAL 1018 PANTONE 123C

RAL 9005 PANTONE B6C

*Please note that the RAL and PANTONE colours listed are the closest match to standard RAYSAN colours, but may not be exact matches of the actual product colour and should be used for guidance only.

SUITABLE FOR



Value Nature and People

FOLLOW US



DISCOVER MORE
about our innovative products,
exceptional services &
global network of dealers.

TÜVNORD

TÜV NORD CERT GmbH

ISO 9001

tuev-nord.de

RAYSAN

AS RAYSAN, WE ARE PROUD TO PIONEER THE FUTURE OF INDUSTRIAL SAFETY. WITH OUR STATE-OF-THE-ART FLEXIBLE PROTECTIVE BARRIERS AND SOLUTIONS, WE ARE AT THE FOREFRONT OF INNOVATION, PROTECTING WORKPLACES AROUND THE WORLD. OUR COMMITMENT TO EXCELLENCE AND UNWAVERING DEDICATION TO ADVANCING SAFETY STANDARDS HAS PROPELLED US TO THE TOP OF THE INDUSTRY.

YOUR TRUSTED PARTNER