Flexible Barrier POLYGUARD PuffyGuard

1R BARRIER XL

OUR XL BARRIER, DESIGNED FOR QUICK ASSEMBLY, OFFERS EXCEPTIONAL PROTECTION AGAINST NEAR-GROUND VEHICLE IMPACTS IN INDOOR AND OUTDOOR AREAS WITH TRANSPORT AND LOADING TRAFFIC. PERFECT FOR SAFEGUARDING STRUCTURES, GOODS, AND MACHINERY IN HIGH-IMPACT ZONES, IT ALSO ORGANIZES AND DEFINES SPACES WITH EASE AND DURABILITY. BUILT TO WITHSTAND CONTINUOUS IMPACTS, IT ENSURES LONG-TERM RELIABILITY IN DEMANDING ENVIRONMENTS.

STRONG AND LIGHTWEIGHT

Thanks to its unique chemical formula, our barrier surpasses steel barriers in both strength and weight. It is significantly lighter while maintaining its exceptional durability.

MODULAR

Thanks to its modular design, our barrier effortlessly adapts to the changing needs of your facility. This flexible solution is extremely easy to install, assemble, disassemble, relocate and organize.

NO CORROSION

Unlike steel barriers, our barriers are made of durable polymer materials, making them unaffected by environmental elements such as sunlight and rainwater.

NO PAINT AND MAINTENANCE NEEDED

Unlike Raysan's steel barriers that require regular painting and maintenance, our self-colored structure eliminates the need for these processes. Even if the barrier is scratched due to an impact, its surface retains its original color without any change.

ULTRAVIOLET RESISTANT

Our barriers are designed with exceptional resistance to UV radiation. Their chemical structure remains intact even after prolonged outdoor use, ensuring long-term durability.

ANTIBACTERIAL

Our barriers have an exceptional chemical formula that prevents them from having any chemical reaction with the substances they come into contact with.

EXPERIENCE UNPARALLELED STRENGTH

WITH OUR ADVANCED POLYMER, CRAFTED FROM A PREMIUM BLEND OF SOPHISTICATED POLYOLEFINS AND RUBBER ADDITIVES. THIS EXCLUSIVE COMPOSITION DELIVERS UNMATCHED DURABILITY AND FLEXIBILITY. OUR CUTTING-EDGE ENGINEERING PROCESS REORIENTS THE MOLECULAR STRUCTURE DURING MANUFACTURING, ENDOWING THE BARRIER WITH A UNIQUE BUILT-IN MEMORY. THIS INNOVATIVE FEATURE ENSURES THAT THE BARRIER RECOVERS COMPLETELY AFTER IMPACTS, MAINTAINING PEAK PERFORMANCE AND RELIABILITY.



ZETA

Post Dimension [D1]

Ø160 mm

Post Height [H]

400 mm

Rail Dimension [D2]

Rail Length Range [L1]

Barrier Length MAX [L2]

Impact Zone [Z]

700 mm - 3620 mm Ø250 mm

3620 mm

250 mm

TETA

Post Dimension D1

Ø125 mm

RAL 1018 PANTONE 123C

Post Height [H]

310 mm

Rail Dimension [D2]

Ø160 mm

Rail Length Range [L1]

700 mm -3250 mm

3250 mm

Barrier Length MAX [L2]

160 mm

PULL OUT

FORCE

Impact Zone Z

STANDART COLORS



Z

RAL 9005 PANTONE B6C

FIXING REQUIREMENTS



ELECTROSTATIC PAINT



STAINLESS STEEL



Concrete Quality

Water and Humidity

GALVANIZE

Concrete Floor Plate Thickness [mm]






environments.

water and humidity.



Stainless Steel: Ideal for outdoor use or environments with frequent exposure to



PROTECTION SOLUTIONS





IMPACT

ZETA

90° IMPACT

TETA 10,300 JOULE

16,200 JOULE






ENERGY

DETAILS

BUILDING AND CORRIDOR

*90° Impact on Mid Rail of Maximum Post Centres *Results are Reflecting instantaneous Impact Values *Does not Provide Resistance to Sharp Impacts



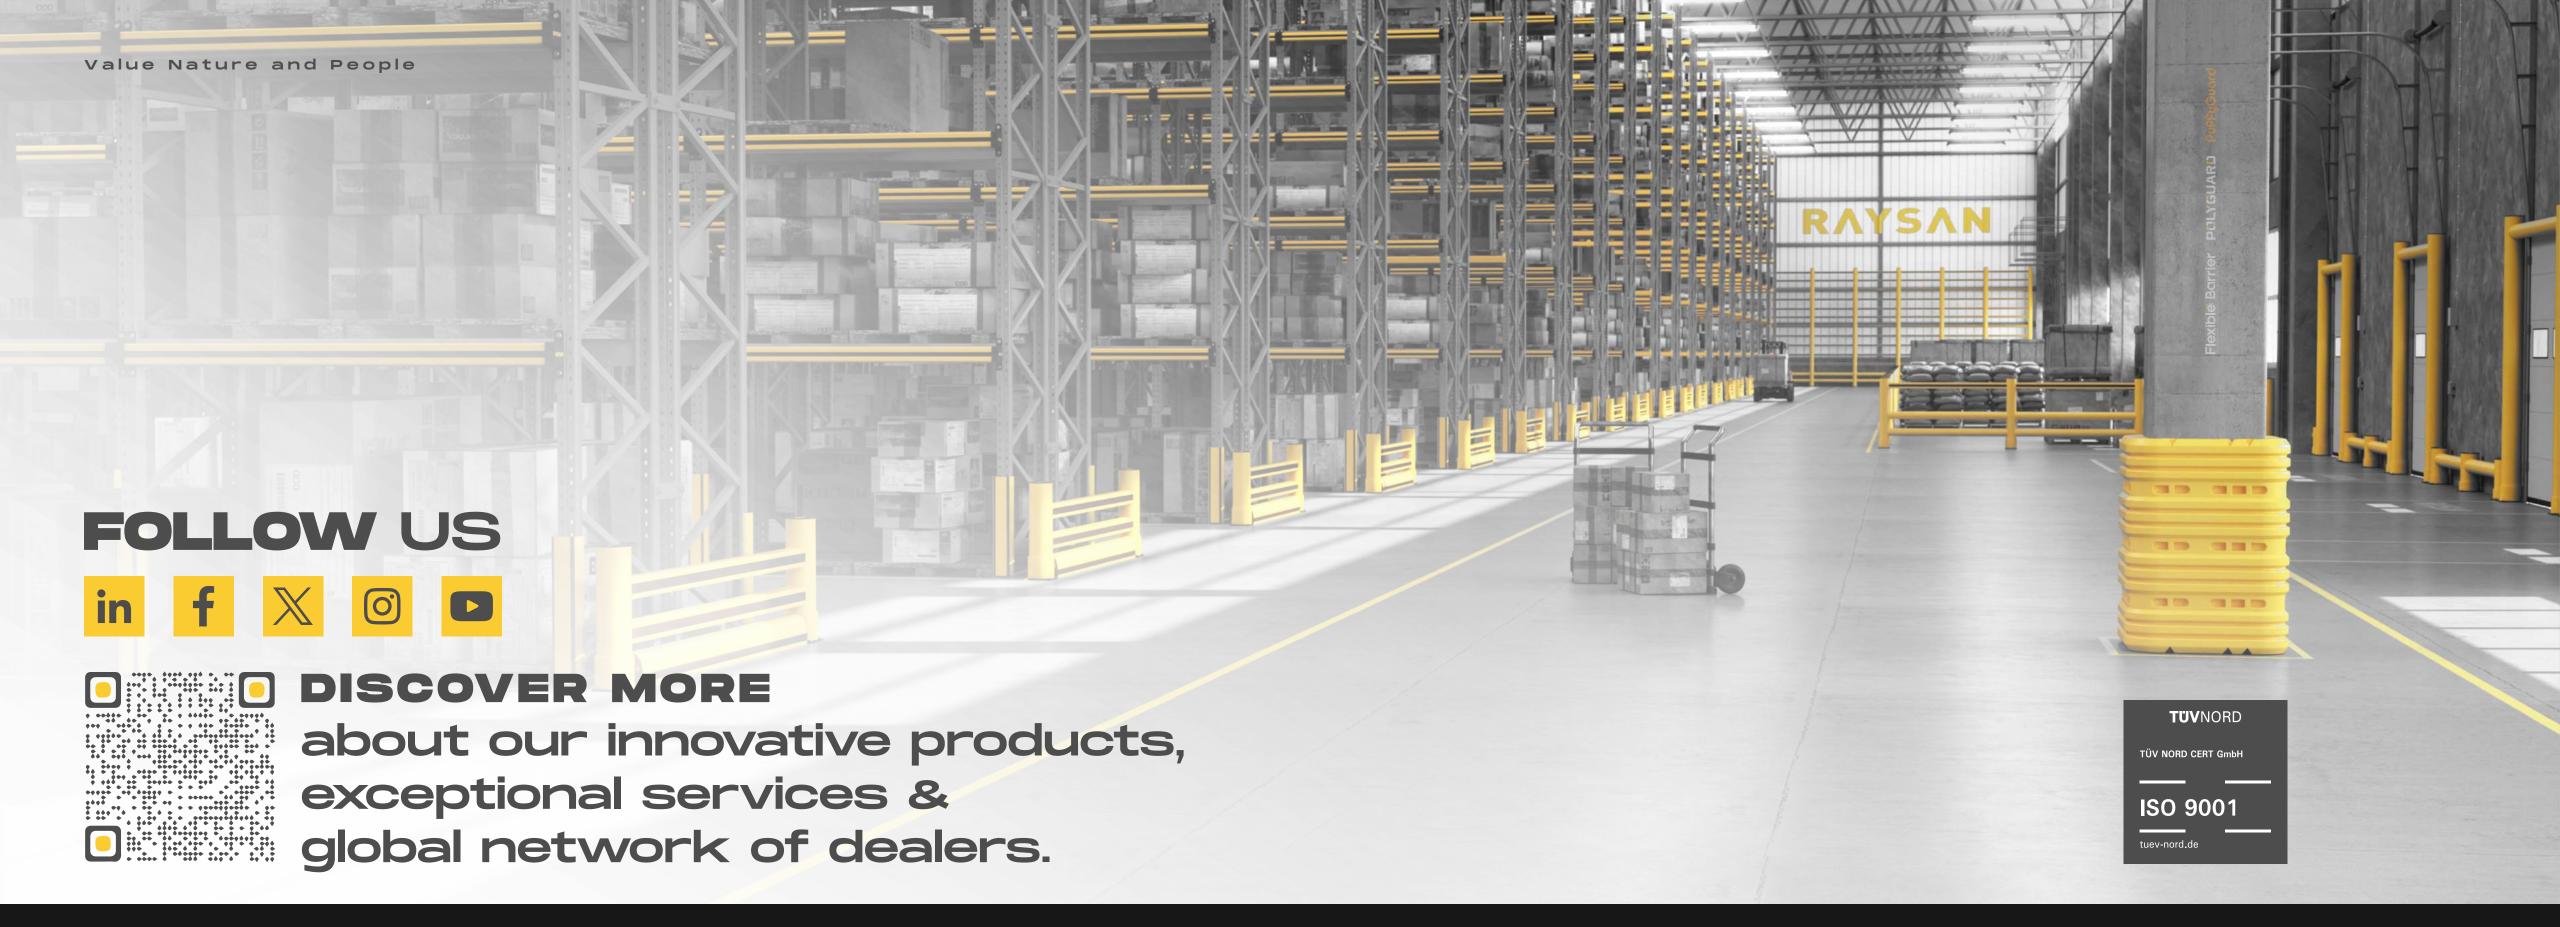

RAYSAN

AS RAYSAN, WE ARE PROUD TO PIONEER THE FUTURE OF INDUSTRIAL SAFETY. WITH OUR STATE—OF—THE—ART FLEXIBLE PROTECTIVE BARRIERS AND SOLUTIONS, WE ARE AT THE FOREFRONT OF INNOVATION, PROTECTING WORKPLACES AROUND THE WORLD. OUR COMMITMENT TO EXCELLENCE AND UNWAVERING DEDICATION TO ADVANCING SAFETY STANDARDS HAS PROPELLED US TO THE TOP OF THE INDUSTRY.

