2R BARRER - KERE

WITH ITS EASY-TO-ASSEMBLE DESIGN, THIS BARRIER IS PERFECT FOR SAFEGUARDING STRUCTURES, GOODS, AND MACHINERY FROM MEDIUM-HEIGHT VEHICLE IMPACTS IN BUSY INDOOR AND OUTDOOR AREAS. REINFORCED WITH A KERB BARRIER, IT ALSO ORGANIZES AND DEFINES SPACES WHILE OFFERING EXTRA PROTECTION AGAINST COLLISIONS FROM FORKLIFT FORKS AND KNIVES WITH ITS ADDED **RESTRICTIVE TYPE PROTECTION BARRIER.**





STRONG AND LIGHTWEIGHT

Thanks to its unique chemical formula, our barrier surpasses steel barriers in both strength and weight. It is significantly lighter while maintaining its exceptional durability.

MODULAR

Thanks to its modular design, our barrier effortlessly adapts to the changing needs of your facility. This flexible solution is extremely easy to install, assemble, disassemble, relocate and organize.

NO CORROSION

Unlike steel barriers, our barriers are made of durable polymer materials, making them unaffected by environmental elements such as sunlight and rainwater.

NO PAINT AND MAINTENANCE NEEDED

Unlike Raysan's steel barriers that require regular painting and maintenance, our self-colored structure eliminates the need for these processes. Even if the barrier is scratched due to an impact, its surface retains its original color without any change.

ULTRAVIOLET RESISTANT

Our barriers are designed with exceptional resistance to UV radiation. Their chemical structure remains intact even after prolonged outdoor use, ensuring long-term durability.

ANTIBACTERIAL

Our barriers have an exceptional chemical formula that prevents them from having any chemical reaction with the substances they come into contact with.




EXPERIENCE UNPARALLELED STRENGTH WITH OUR ADVANCED POLYMER, CRAFTED FROM A PREMIUM BLEND OF SOPHISTICATED POLYOLEFINS AND RUBBER ADDITIVES. THIS EXCLUSIVE COMPOSITION DELIVERS UNMATCHED DURABILITY AND FLEXIBILITY. OUR CUTTING-EDGE ENGINEERING PROCESS REORIENTS THE MOLECULAR STRUCTURE DURING MANUFACTURING, ENDOWING THE BARRIER WITH A UNIQUE BUILT-IN MEMORY. THIS INNOVATIVE FEATURE ENSURES THAT THE BARRIER RECOVERS COMPLETELY AFTER IMPACTS, MAINTAINING PEAK PERFORMANCE AND RELIABILITY.




ALPHA	Post Dimension [D1]	Post Height [H]	Rail Dimension [D2]	Rail Length Range [L1]
	Ø250 mm	820 mm	Ø200 mm	810 mm - 3000 mm
DELTA	Post Dimension [D1]	Post Height [H]	Rail Dimension [D2]	Rail Length Range [L1]
	Ø200 mm	740 mm	Ø160 mm	760 mm - 2700 mm
	Post Dimension [D1]	Post Height [H]	Rail Dimension [D2]	Rail Length Range [L1]
	Ø160 mm	670 mm	Ø125 mm	720 mm - 2350 mm



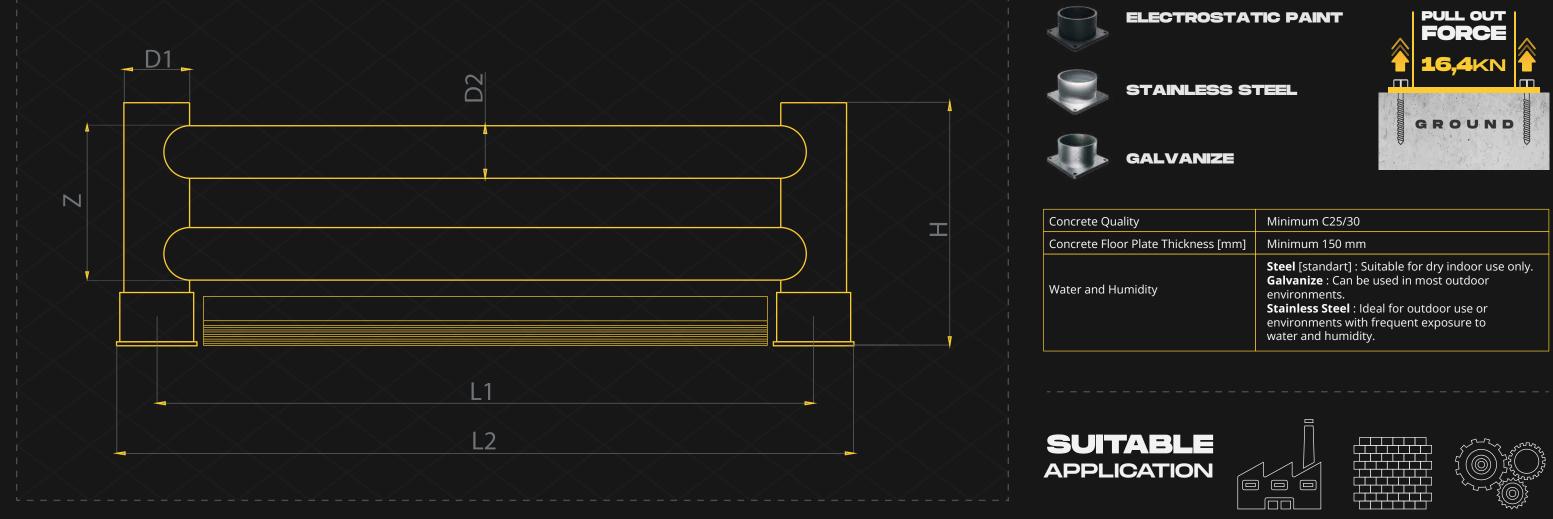


*Please note that the RAL and PANTONE colours listed are the closest match to standard RAYSAN colours, but may not be exact matches of the actual product colour and should be used for guidance only.



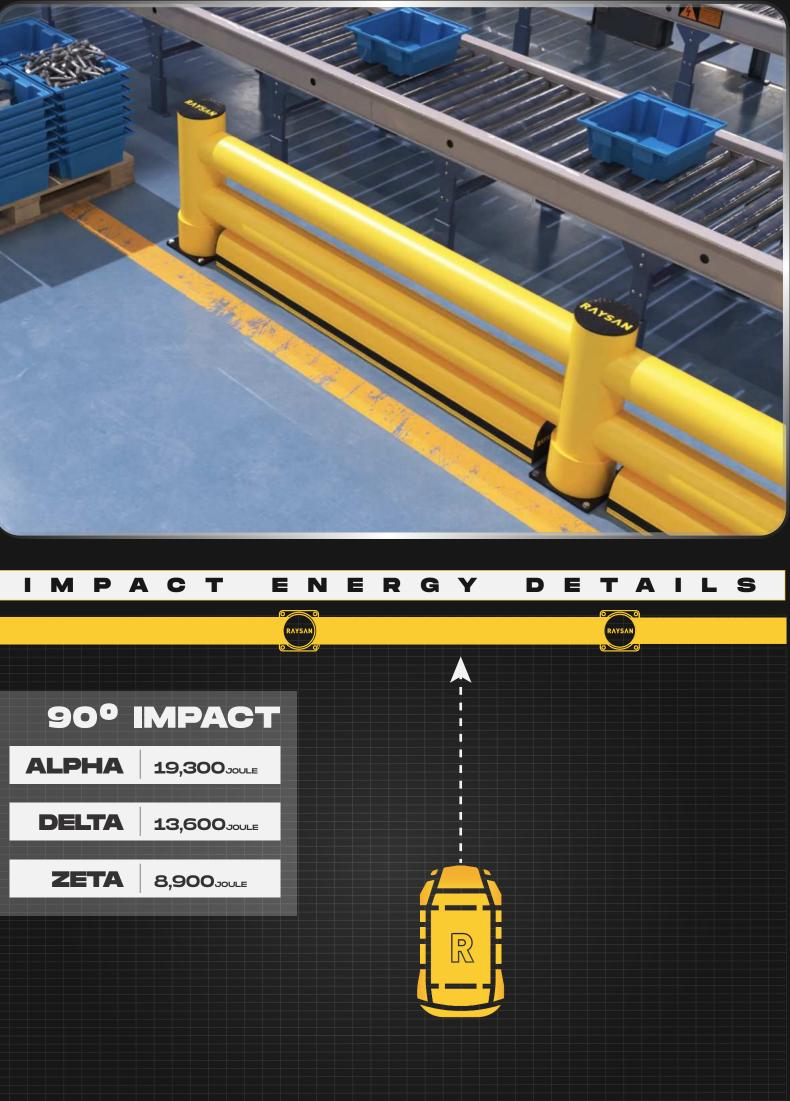



rete Quality	Minimum C25/30		
rete Floor Plate Thickness [mm]	Minimum 150 mm		
r and Humidity	 Steel [standart] : Suitable for dry indoor use only. Galvanize : Can be used in most outdoor environments. Stainless Steel : Ideal for outdoor use or environments with frequent exposure to water and humidity. 		

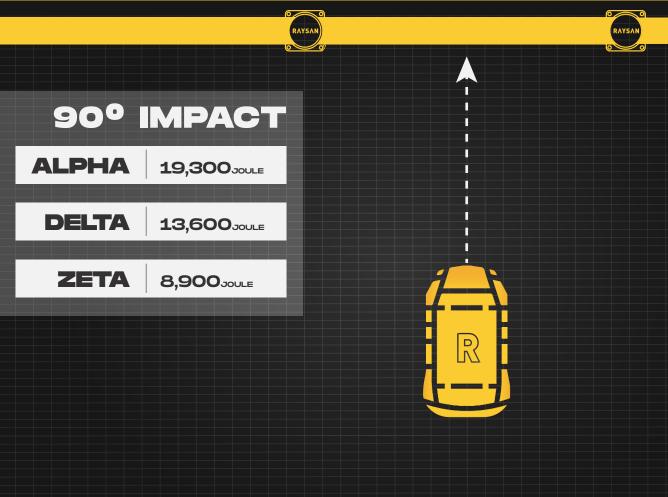

MACHINERY

SUITABLE FOR


*90° Impact on Mid Rail of Maximum Post Centres *Results are Reflecting instantaneous Impact Values *Does not Provide Resistance to Sharp Impacts

BUILDING AND CORRIDOR EQUIPMENT SAFEGUARDS

AND WALL PROTECTION DEFENSES SOLUTIONS

Value Nature and People





DISCOVER MORE about our innovative products, exceptional services & global network of dealers.

RAYSAN

AS RAYSAN, WE ARE PROUD TO PIONEER THE FUTURE OF INDUSTRIAL SAFETY. WITH OUR STATE-OF-THE-ART FLEXIBLE PROTECTIVE BARRIERS AND SOLUTIONS, WE ARE AT THE FOREFRONT OF INNOVATION, PROTECTING WORKPLACES AROUND THE WORLD. OUR COMMITMENT TO EXCELLENCE AND UNWAVERING DEDICATION TO ADVANCING SAFETY STANDARDS HAS PROPELLED US TO THE TOP OF THE INDUSTRY.





