# Flexible Barrier PULYGUARD PUFFyGuard

# 2R PEDESTRIAN BARRIER + KERB

OUR 2R PEDESTRIAN BARRIER IS DESIGNED TO SAFELY SEPARATE PEDESTRIANS FROM MOVING VEHICLES AND WORKPLACE HAZARDS, ENSURING A SECURE ENVIRONMENT. SUITABLE FOR BOTH INDOOR AND OUTDOOR AREAS WITH LIGHT VEHICLE TRAFFIC, IT OFFERS RELIABLE PROTECTION AND ENHANCES SAFETY. REINFORCED WITH A KERB BARRIER, ITS DURABLE DESIGN AND EASY INSTALLATION MAKE IT A PRACTICAL SOLUTION FOR BUSY INDUSTRIAL AND COMMERCIAL SPACES.

#### **STRONG AND LIGHTWEIGHT**

Thanks to its unique chemical formula, our barrier surpasses steel barriers in both strength and weight. It is significantly lighter while maintaining its exceptional durability.

#### **MODULAR**

Thanks to its modular design, our barrier effortlessly adapts to the changing needs of your facility. This flexible solution is extremely easy to install, assemble, disassemble, relocate and organize.

#### **NO CORROSION**

Unlike steel barriers, our barriers are made of durable polymer materials, making them unaffected by environmental elements such as sunlight and rainwater.

#### NO PAINT AND MAINTENANCE NEEDED

Unlike Raysan's steel barriers that require regular painting and maintenance, our self-colored structure eliminates the need for these processes. Even if the barrier is scratched due to an impact, its surface retains its original color without any change.

#### **ULTRAVIOLET RESISTANT**

Our barriers are designed with exceptional resistance to UV radiation. Their chemical structure remains intact even after prolonged outdoor use, ensuring long-term durability.

#### **ANTIBACTERIAL**

Our barriers have an exceptional chemical formula that prevents them from having any chemical reaction with the substances they come into contact with.


EXPERIENCE UNPARALLELED STRENGTH
WITH OUR ADVANCED POLYMER, CRAFTED
FROM A PREMIUM BLEND OF SOPHISTICATED
POLYOLEFINS AND RUBBER ADDITIVES. THIS
EXCLUSIVE COMPOSITION DELIVERS UNMATCHED
DURABILITY AND FLEXIBILITY. OUR CUTTING-EDGE
ENGINEERING PROCESS REORIENTS THE MOLECULAR
STRUCTURE DURING MANUFACTURING, ENDOWING THE
BARRIER WITH A UNIQUE BUILT-IN MEMORY. THIS
INNOVATIVE FEATURE ENSURES THAT THE BARRIER
RECOVERS COMPLETELY AFTER IMPACTS, MAINTAINING
PEAK PERFORMANCE AND RELIABILITY.



**STANDART COLORS** 

**RAL 1018 PANTONE 123C** 



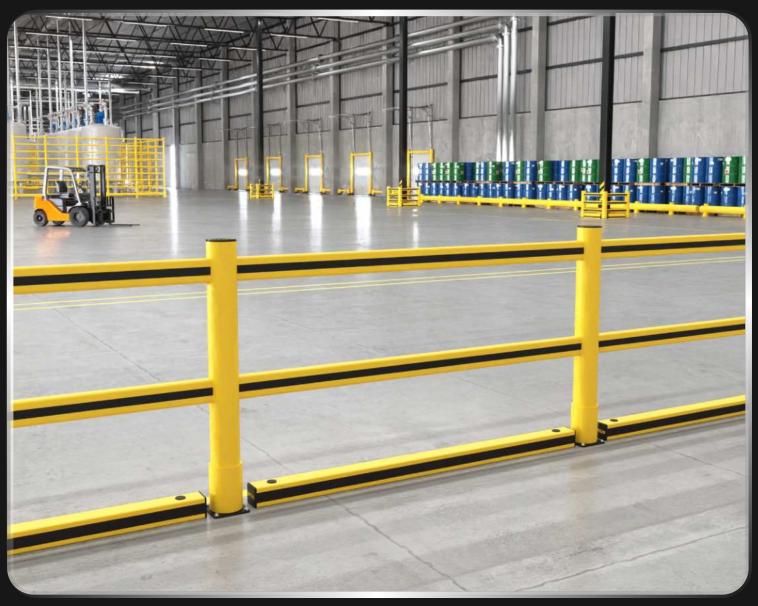

# P1 C NICAL DRAWING

RAL 9005 PANTONE B6C

#### FIXING REQUIREMENTS



**ELECTROSTATIC PAINT** 



STAINLESS STEEL



GALVANIZE



Concrete Quality	Minimum C25/30
Concrete Floor Plate Thickness [mm]	Minimum 150 mm
Water and Humidity	Steel [standart]: Suitable for dry indoor use only. Galvanize: Can be used in most outdoor environments. Stainless Steel: Ideal for outdoor use or environments with frequent exposure to water and humidity.

### **SUITABLE** APPLICATION

\*Please note that the RAL and PANTONE colours listed are the closest match to standard RAYSAN colours, but may not be exact matches of the actual product colour and should be used for guidance only.



CORRIDOR AND WALL DEFENSES



PEDESTRIAN SAFETY SOLUTIONS

## TETA

Post Dimension [D1] Post Height [H]

Rail Dimension [D2]

1100 mm

50 x 100 mm

Rail Length Range [L1]

Ø125 mm

800 mm - 2500 mm

Barrier Length MAX [L2]

2625 mm

Impact Zone [Z]

600 mm


IMPACT ENERGY DETAILS



\*90° Impact on Mid Rail of Maximum Post Centres

\*Results are Reflecting instantaneous Impact Values

\*Does not Provide Resistance to Sharp Impacts

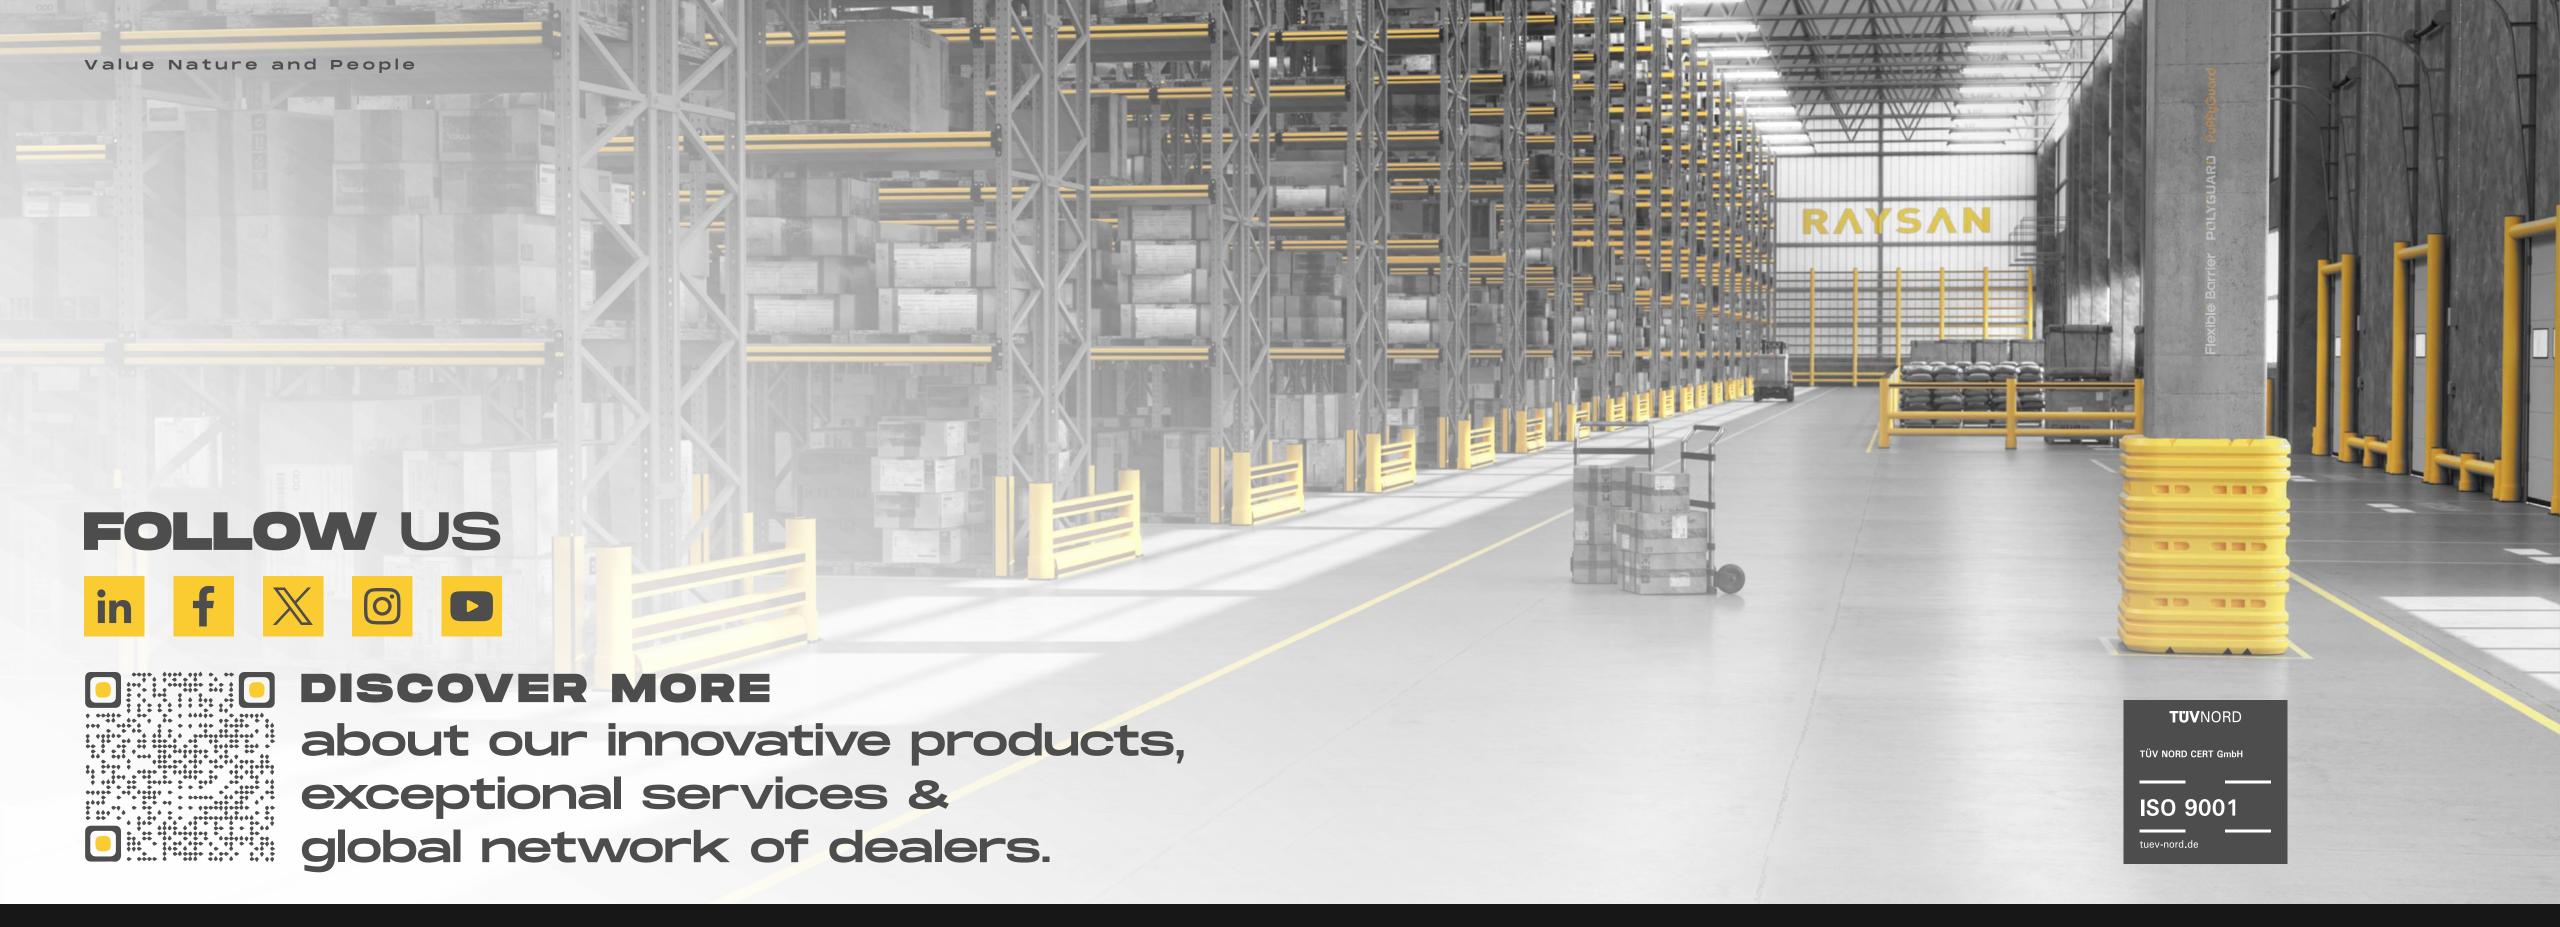

## RAYSAN

AS RAYSAN, WE ARE PROUD TO PIONEER THE FUTURE OF INDUSTRIAL SAFETY. WITH OUR STATE—OF—THE—ART FLEXIBLE PROTECTIVE BARRIERS AND SOLUTIONS, WE ARE AT THE FOREFRONT OF INNOVATION, PROTECTING WORKPLACES AROUND THE WORLD. OUR COMMITMENT TO EXCELLENCE AND UNWAVERING DEDICATION TO ADVANCING SAFETY STANDARDS HAS PROPELLED US TO THE TOP OF THE INDUSTRY.

