Flexible Barrier POLYGUARD PuffyGuard

2R BARRIER O XL HAND RAIL

OUR 2R TRAFFIC HAND RAIL BARRIER IS DESIGNED TO CONTROL VEHICLE MOVEMENT AND PROTECT ASSETS IN ENVIRONMENTS WITH LIGHT VEHICLE TRAFFIC. SUITABLE FOR BOTH INDOOR AND OUTDOOR USE, IT ENHANCES SAFETY BY MANAGING TRAFFIC FLOW AND REDUCING THE RISK OF COLLISIONS. ITS DURABLE, LOW-MAINTENANCE DESIGN ENSURES LONG-LASTING PERFORMANCE, EVEN IN HIGH-TRAFFIC AREAS. THE BARRIER'S MODULAR STRUCTURE ALLOWS FOR QUICK INSTALLATION AND EASY CUSTOMIZATION TO ADAPT TO VARIOUS LAYOUTS AND SAFETY NEEDS.

STRONG AND LIGHTWEIGHT

Thanks to its unique chemical formula, our barrier surpasses steel barriers in both strength and weight. It is significantly lighter while maintaining its exceptional durability.

MODULAR

Thanks to its modular design, our barrier effortlessly adapts to the changing needs of your facility. This flexible solution is extremely easy to install, assemble, disassemble, relocate and organize.

CORROSION-FREE

Unlike steel barriers, our barriers are made of durable polymer materials, making them unaffected by environmental elements such as sunlight and rainwater.

NO PAINTING OR MAINTENANCE REQUIRED

Unlike Raysan's steel barriers that require regular painting and maintenance, our self-colored structure eliminates the need for these processes. Even if the barrier is scratched due to an impact, its surface retains its original color without any change.

UV-RESISTANT

Our barriers are designed with exceptional resistance to UV radiation. Their chemical structure remains intact even after prolonged outdoor use, ensuring long-term durability.

ANTIMICROBIAL

Our barriers have an exceptional chemical formula that prevents them from having any chemical reaction with the substances they come into contact with.

EXPERIENCE UNPARALLELED STRENGTH

WITH OUR ADVANCED POLYMER, CRAFTED FROM A PREMIUM BLEND OF SOPHISTICATED **POLYOLEFINS AND RUBBER ADDITIVES. THIS EXCLUSIVE COMPOSITION DELIVERS UNMATCHED DURABILITY AND FLEXIBILITY. OUR CUTTING-EDGE** ENGINEERING PROCESS REORIENTS THE MOLECULAR **STRUCTURE** DURING MANUFACTURING, ENDOWING THE BARRIER WITH A UNIQUE BUILT-IN MEMORY. THIS INNOVATIVE FEATURE ENSURES THAT THE BARRIER **RECOVERS COMPLETELY AFTER IMPACTS, MAINTAINING** PEAK PERFORMANCE AND RELIABILITY.





Post Dimension D1

Post Height [H]

Rail Dimension [D2]

Rail Dimension [D3]

Rail Length Range [L]

Impact Zone [Z]

Ø61/3"

431/3"

Ø95/6"

2" x 4"

393/8" - 1123/5"

19²/₃"



STANDART COLORS

RAL 1018 PANTONE 123C

Post Dimension D1

Ø5"

Post Height [H]

431/3"

Rail Dimension [D2]

Ø61/3"

*Please note that the RAL and PANTONE colours listed

are the closest match to standard RAYSAN colours, but may not be exact matches of the actual product colour and should be used for guidance only.

Rail Dimension [D3]


2" x 4"

Rail Length Range [L]

393/8" - 1111/4"

123/5"

Impact Zone [Z]

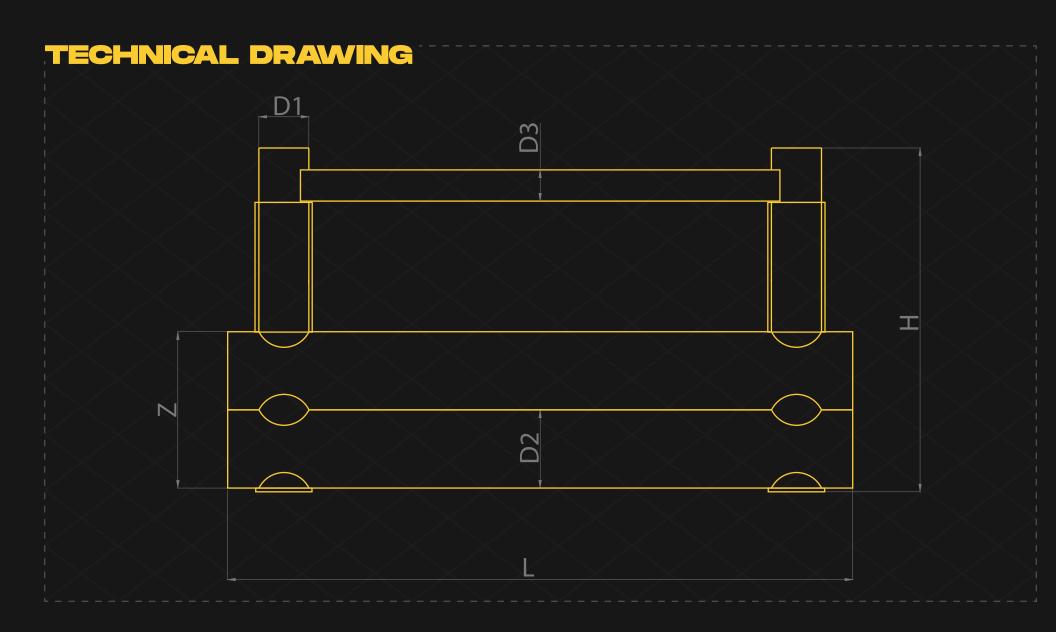

RAL 9005 PANTONE B6C

FIXING REQUIREMENTS



ELECTROSTATIC PAINT



STAINLESS STEEL



GALVANIZED



Concrete Quality	Minimum C25/30
Concrete Floor Plate Thickness [mm]	Minimum 6"
Water and Humidity	Steel [standart]: Suitable for dry indoor use only. Galvanize: Can be used in most outdoor environments. Stainless Steel: Ideal for outdoor use or environments with frequent exposure to water and humidity.

SUITABLE APPLICATION






BUILDING AND MACHINERY PEDESTRIAN EQUIPMENT PROTECTION SAFETY SAFEGUARDS SOLUTIONS





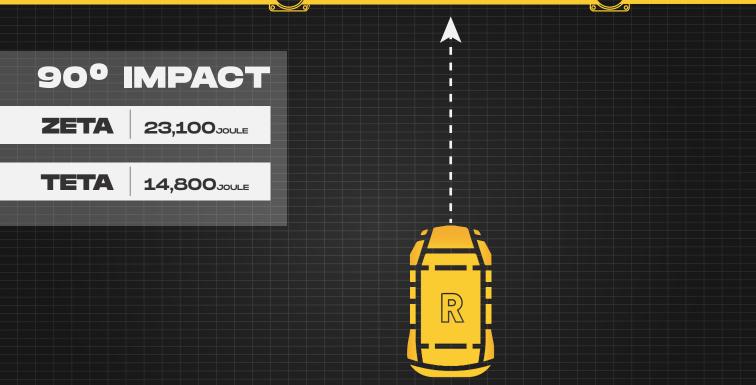










*90° Impact on Mid Rail of Maximum Post Centres *Results are Reflecting instantaneous Impact Values *Does not Provide Resistance to Sharp Impacts

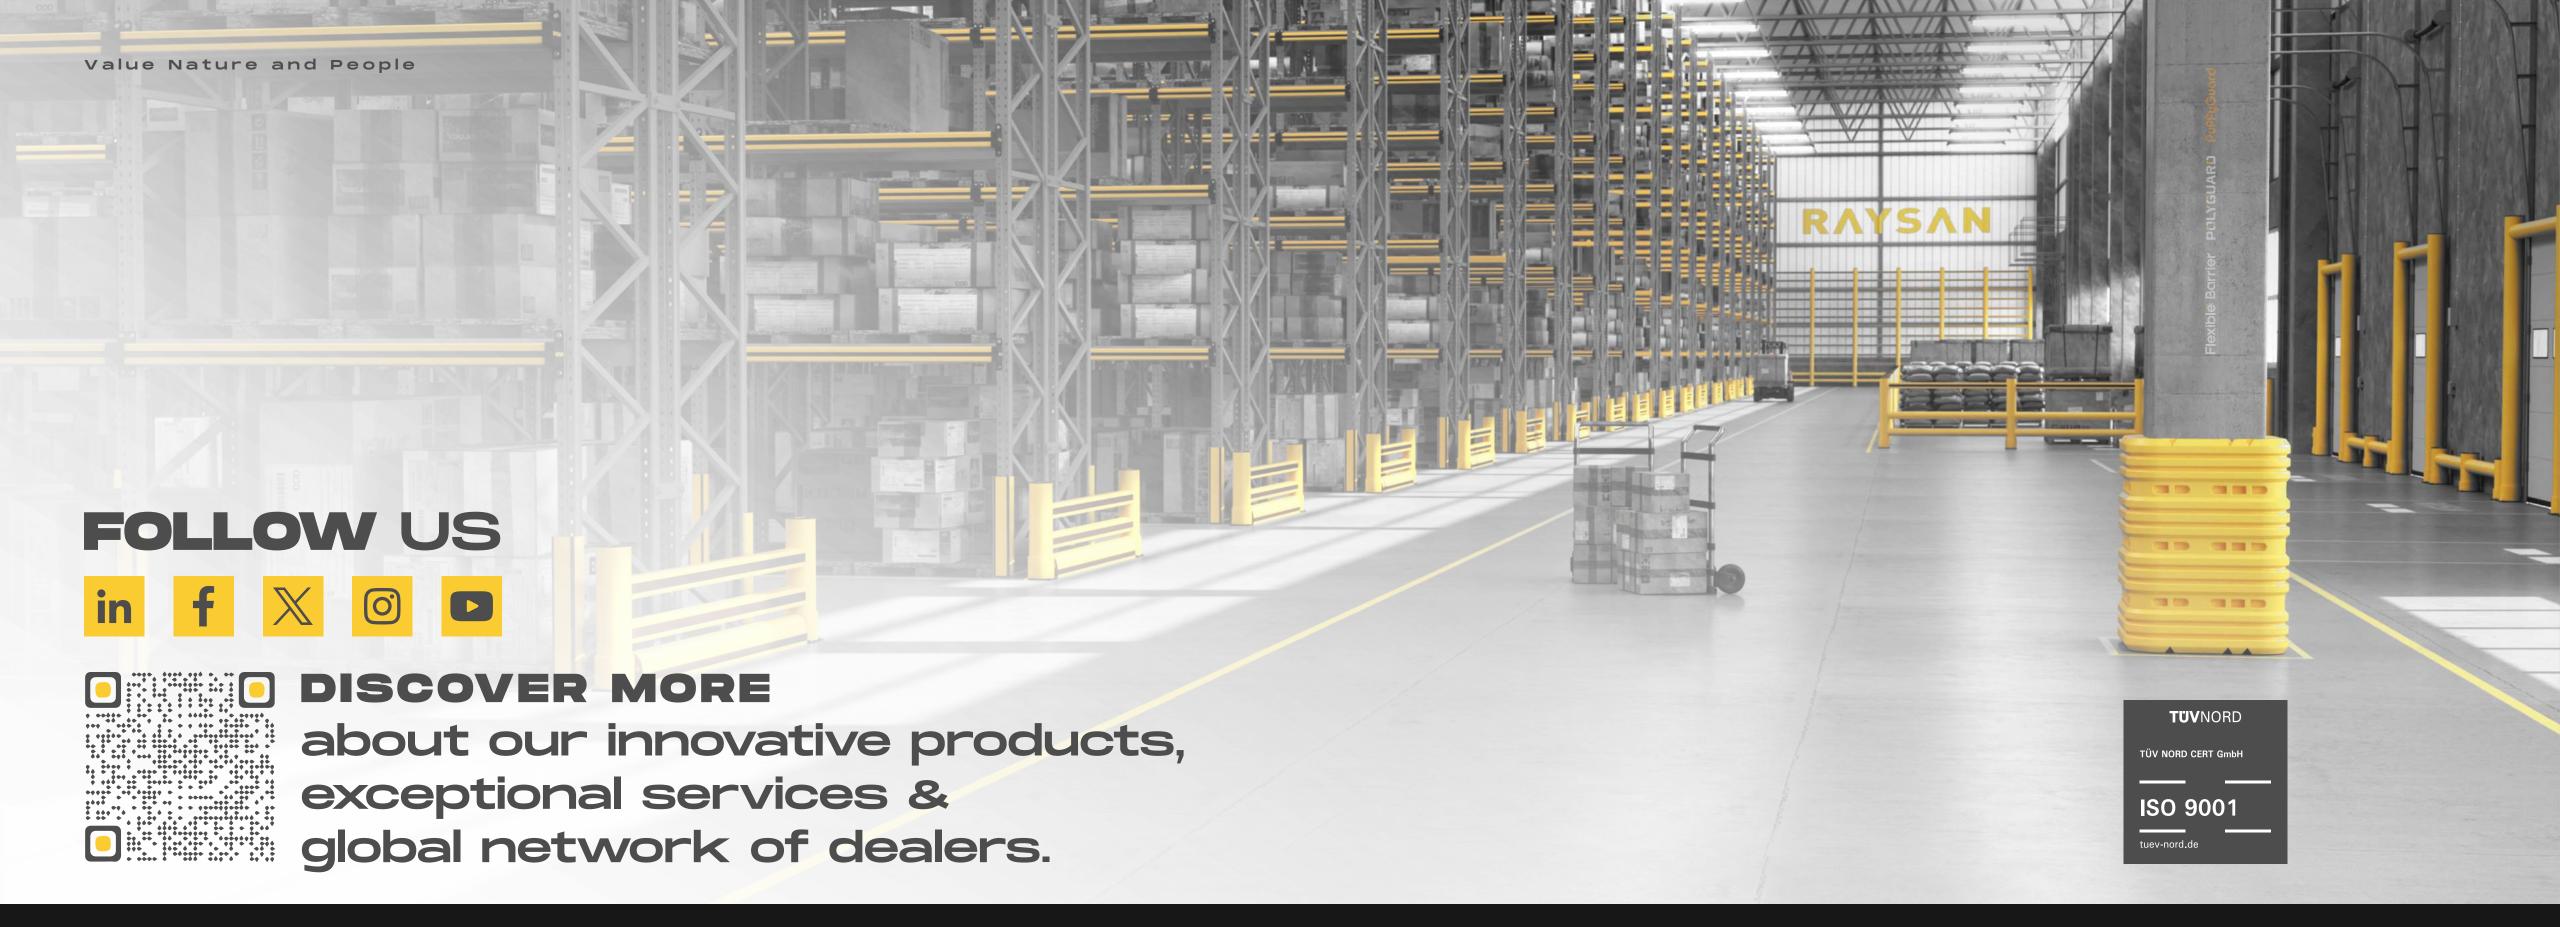

RAYSAN

AS RAYSAN, WE ARE PROUD TO PIONEER THE FUTURE OF INDUSTRIAL SAFETY. WITH OUR STATE—OF—THE—ART FLEXIBLE PROTECTIVE BARRIERS AND SOLUTIONS, WE ARE AT THE FOREFRONT OF INNOVATION, PROTECTING WORKPLACES AROUND THE WORLD. OUR COMMITMENT TO EXCELLENCE AND UNWAVERING DEDICATION TO ADVANCING SAFETY STANDARDS HAS PROPELLED US TO THE TOP OF THE INDUSTRY.

