Flexible Barrier POLYGUARD PuffyGuard

TOPPLE BARRIER

DESIGNED FOR EASY ASSEMBLY, THIS BARRIER IS IDEAL FOR PREVENTING STACKED GOODS FROM TOPPLING OVER IN STORAGE AREAS WITH TRANSPORT AND LOADING TRAFFIC. SPECIFICALLY CRAFTED TO SECURE STORED MATERIALS, IT REDUCES THE RISK OF ACCIDENTAL FALLS CAUSED BY MOVEMENT AND IMPACT. REINFORCED FOR MAXIMUM STABILITY, IT ENSURES DURABLE PROTECTION, ENHANCING SAFETY FOR BOTH GOODS AND WORKERS IN INDUSTRIAL ENVIRONMENTS.

RAYSAN

EXPERIENCE UNPARALLELED STRENGTH
WITH OUR ADVANCED POLYMER, CRAFTED
FROM A PREMIUM BLEND OF SOPHISTICATED
POLYOLEFINS AND RUBBER ADDITIVES. THIS
EXCLUSIVE COMPOSITION DELIVERS
UNMATCHED DURABILITY AND FLEXIBILITY. OUR
CUTTING-EDGE ENGINEERING PROCESS
REORIENTS THE MOLECULAR STRUCTURE DURING
MANUFACTURING, ENDOWING THE BARRIER WITH A
UNIQUE BUILT-IN MEMORY. THIS INNOVATIVE
FEATURE ENSURES THAT THE BARRIER RECOVERS
COMPLETELY AFTER IMPACTS, MAINTAINING PEAK
PERFORMANCE AND RELIABILITY.

STRONG AND LIGHTWEIGHT

Thanks to its unique chemical formula, our barrier surpasses steel barriers in both strength and weight. It is significantly lighter while maintaining its exceptional durability.

MODULAR

Thanks to its modular design, our barrier effortlessly adapts to the changing needs of your facility. This flexible solution is extremely easy to install, assemble, disassemble, relocate and organize.

CORROSION-FREE

Unlike steel barriers, our barriers are made of durable polymer materials, making them unaffected by environmental elements such as sunlight and rainwater.

NO PAINTING OR MAINTENANCE REQUIRED

Unlike Raysan's steel barriers that require regular painting and maintenance, our self-colored structure eliminates the need for these processes. Even if the barrier is scratched due to an impact, its surface retains its original color without any change.

UV-RESISTANT

Our barriers are designed with exceptional resistance to UV radiation. Their chemical structure remains intact even after prolonged outdoor use, ensuring long-term durability.

ANTIMICROBIAL

Our barriers have an exceptional chemical formula that prevents them from having any chemical reaction with the substances they come into contact with.



DELTA

Post Dimension D1

Post Height [H]

Rail Dimension [D2]

Rail Length Range [L2]

Impact Zone [Z]


Ø7%"

823/3"

2" x 4"

193" - 59"

661/6"

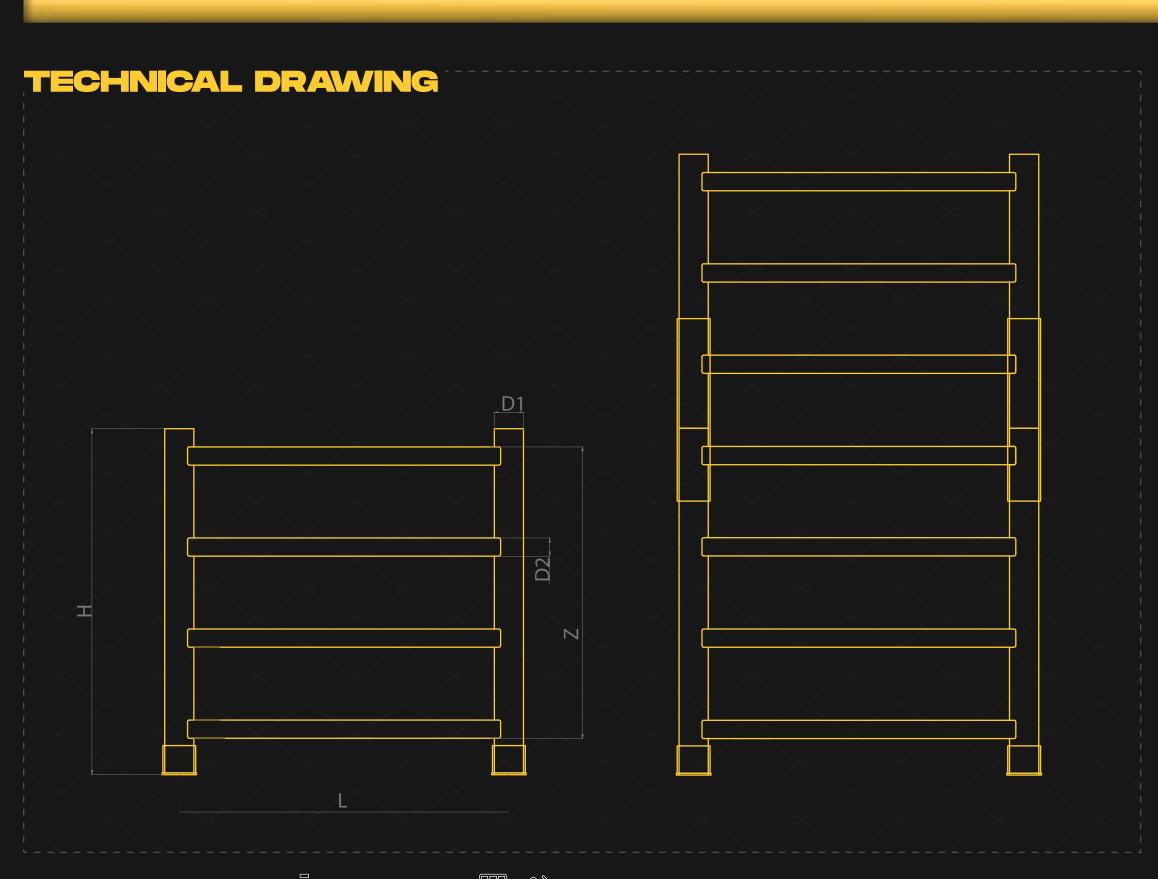

FIXING REQUIREMENTS



ELECTROSTATIC PAINT



STAINLESS STEEL



GALVANIZED



Concrete Quality

Minimum C25/30

Concrete Floor Plate Thickness [mm]

Minimum 6"

Steel [standart]: Suitable for dry indoor use only.

Galvanize: Can be used in most outdoor environments.

Stainless Steel: Ideal for outdoor use or environments with frequent exposure to water and humidity.



APPLICATION

SUITABLE FOR

LIGHTWEIGHT






EQUIPMENT AND WALL STACKED
SAFEGUARDS DEFENSES LOADS

*Please note that the RAL and PANTONE colours listed are the closest match to standard RAYSAN colours, but may not be exact matches of the actual product colour and should be used for guidance only.

BUILDING AND CORRIDOR

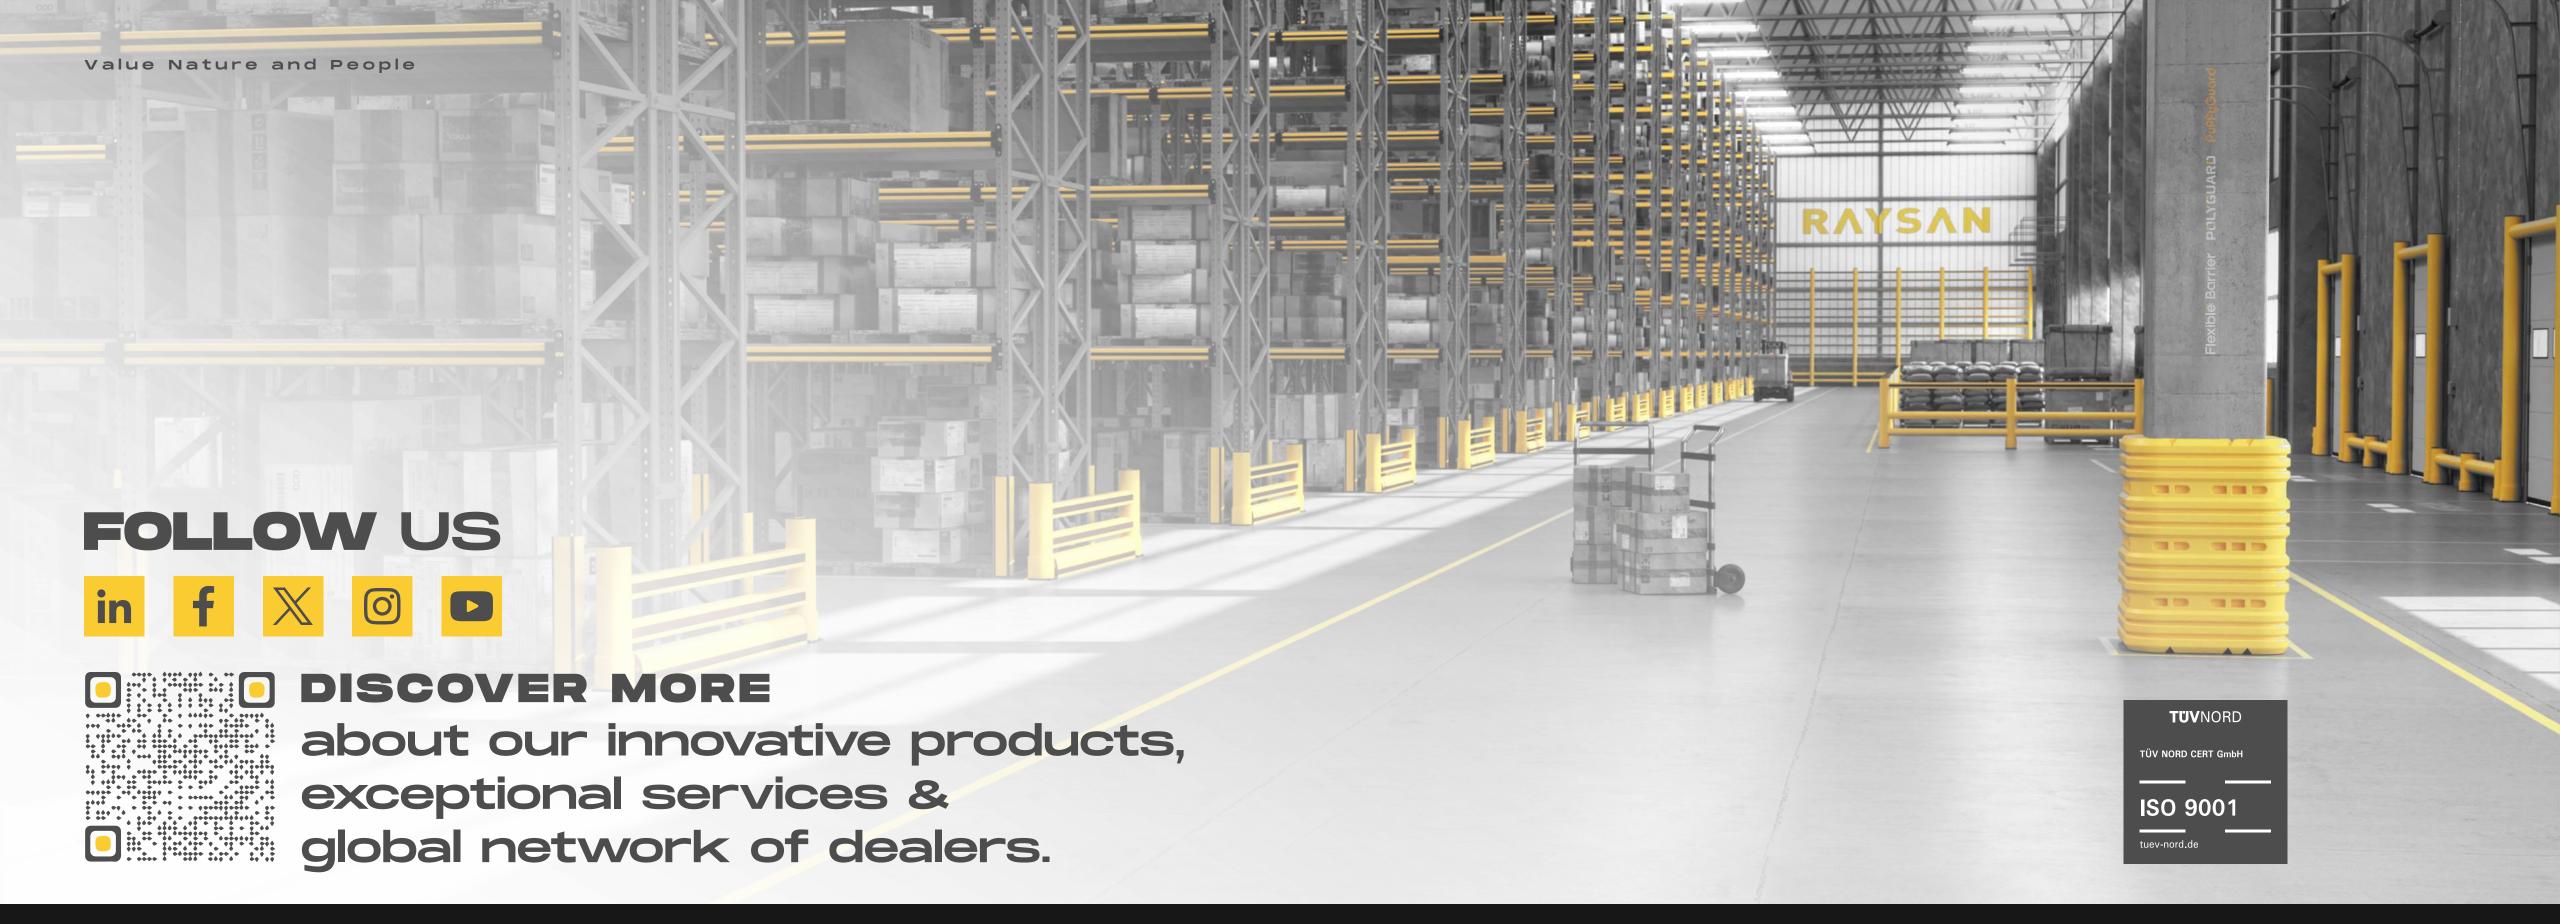

RAYSAN

AS RAYSAN, WE ARE PROUD TO PIONEER THE FUTURE OF INDUSTRIAL SAFETY. WITH OUR STATE—OF—THE—ART FLEXIBLE PROTECTIVE BARRIERS AND SOLUTIONS, WE ARE AT THE FOREFRONT OF INNOVATION, PROTECTING WORKPLACES AROUND THE WORLD. OUR COMMITMENT TO EXCELLENCE AND UNWAVERING DEDICATION TO ADVANCING SAFETY STANDARDS HAS PROPELLED US TO THE TOP OF THE INDUSTRY.

