# Flexible Barrier POLYGUARD PuffyGuard

### DOCK GATE

A DOCK GATE BARRIER IS SPECIFICALLY DESIGNED TO CONTROL AND PREVENT UNAUTHORIZED VEHICLE ACCESS IN INDUSTRIAL AREAS. ITS MANUALLY OPERATED STRUCTURE ENSURES THAT ONLY AUTHORIZED VEHICLES CAN ENTER OR EXIT THE PREMISES, WHILE ALSO SERVING AS A PROTECTIVE MEASURE DURING ACCIDENTS. IN ADDITION TO BLOCKING UNAUTHORIZED ENTRY, THE BARRIER HELPS TO SAFEGUARD THE INTEGRITY OF DOCK DOORS AND SURROUNDING INFRASTRUCTURE BY PREVENTING ACCIDENTAL COLLISIONS OR DAMAGE FROM STRAY VEHICLES.

#### **STRONG AND LIGHTWEIGHT**

Thanks to its unique chemical formula, our barrier surpasses steel barriers in both strength and weight. It is significantly lighter while maintaining its exceptional durability.

#### **MODULAR**

Thanks to its modular design, our barrier effortlessly adapts to the changing needs of your facility. This flexible solution is extremely easy to install, assemble, disassemble, relocate and organize.

#### **NO CORROSION**

Unlike steel barriers, our barriers are made of durable polymer materials, making them unaffected by environmental elements such as sunlight and rainwater.

#### NO PAINT AND MAINTENANCE NEEDED

Unlike Raysan's steel barriers that require regular painting and maintenance, our self-colored structure eliminates the need for these processes. Even if the barrier is scratched due to an impact, its surface retains its original color without any change.

#### **ULTRAVIOLET RESISTANT**

Our barriers are designed with exceptional resistance to UV radiation. Their chemical structure remains intact even after prolonged outdoor use, ensuring long-term durability.

#### **ANTIBACTERIAL**

Our barriers have an exceptional chemical formula that prevents them from having any chemical reaction with the substances they come into contact with.

**EXPERIENCE UNPARALLELED STRENGTH** 

WITH OUR ADVANCED POLYMER, CRAFTED
FROM A PREMIUM BLEND OF SOPHISTICATED
POLYOLEFINS AND RUBBER ADDITIVES. THIS
EXCLUSIVE COMPOSITION DELIVERS UNMATCHED
DURABILITY AND FLEXIBILITY. OUR CUTTING-EDGE
ENGINEERING PROCESS REORIENTS THE MOLECULAR
STRUCTURE DURING MANUFACTURING, ENDOWING THE
BARRIER WITH A UNIQUE BUILT-IN MEMORY. THIS
INNOVATIVE FEATURE ENSURES THAT THE BARRIER
RECOVERS COMPLETELY AFTER IMPACTS, MAINTAINING
PEAK PERFORMANCE AND RELIABILITY.



DELTA

Post Dimension [D1]

Ø200 mm

Post Height [H]

400 mm

Rail Dimension [D2]

Ø160 mm

Rail Length Range [L1]

Barrier Length MAX [L2]

Impact Zone [Z]

2000 mm - 3500 mm

3500 mm

160 mm

ZETA

**STANDART COLORS** 

Post Dimension [D1]

Ø160 mm

Post Height [H]

400 mm

Rail Dimension [D2]

Ø125 mm

\*Please note that the RAL and PANTONE colours listed are the closest match to standard RAYSAN colours, but may not be exact matches of the actual product colour and should be used for guidance only.

Rail Length Range [L1]

1500 mm - 2500 mm


Impact Zone [Z]

2500 mm

Barrier Length MAX [L2]

125 mm



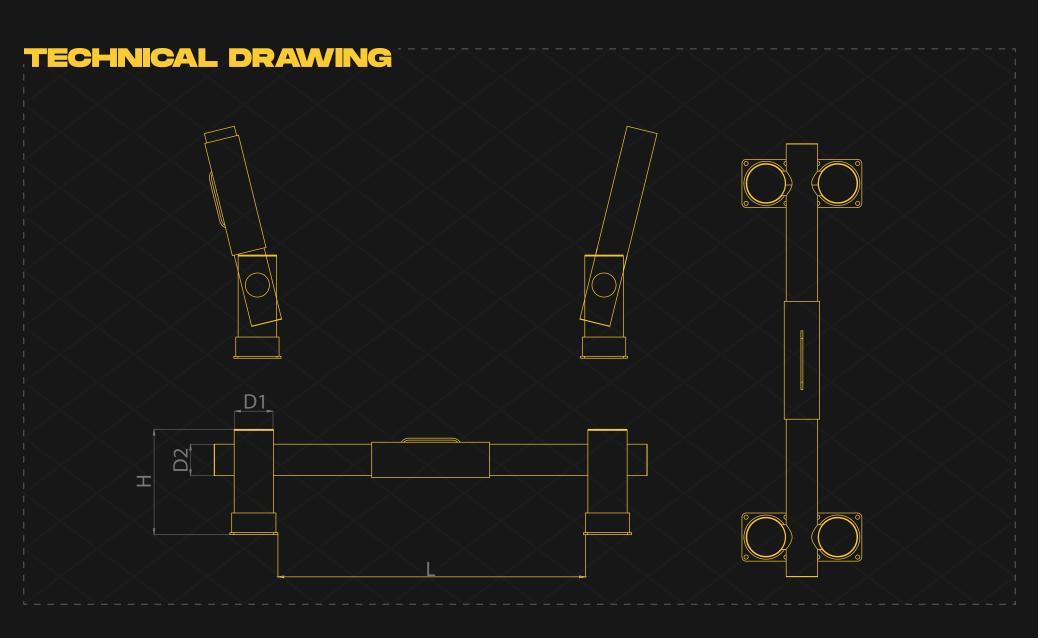

RAL 9005 PANTONE B6C

**RAL 1018 PANTONE 123C** 

#### **FIXING REQUIREMENTS**



**ELECTROSTATIC PAINT** 



STAINLESS STEEL



**GALVANIZE** 



Concrete Quality	Minimum C25/30
Concrete Floor Plate Thickness [mm]	Minimum 150 mm
Water and Humidity	Steel [standart] : Suitable for dry indoor use only. Galvanize : Can be used in most outdoor environments. Stainless Steel : Ideal for outdoor use or environments with frequent exposure to water and humidity.





BUILDING AND CORRIDOR
EQUIPMENT AND WALL
SAFEGUARDS DEFENSES












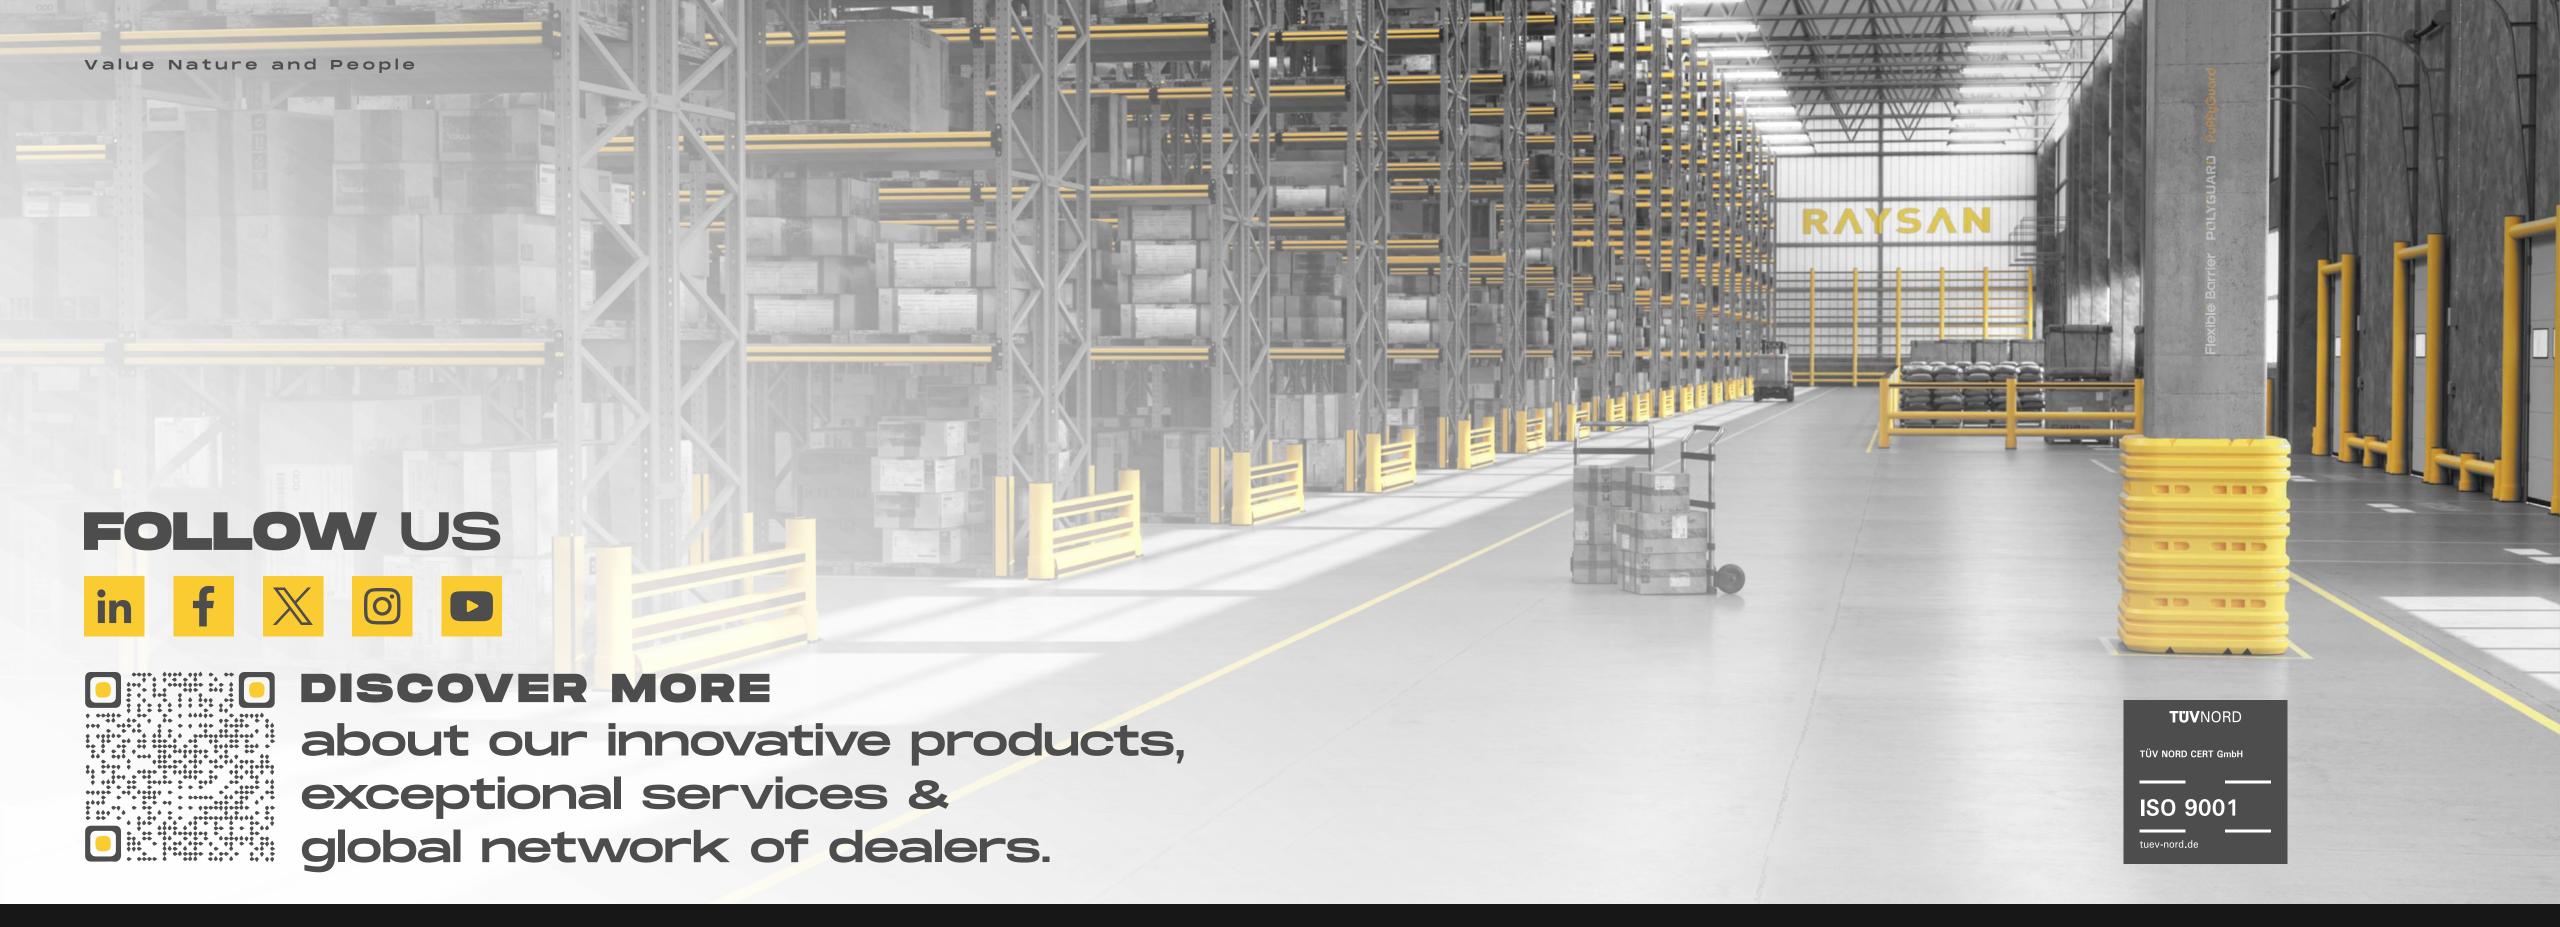

## RAYSAN

AS RAYSAN, WE ARE PROUD TO PIONEER THE FUTURE OF INDUSTRIAL SAFETY. WITH OUR STATE—OF—THE—ART FLEXIBLE PROTECTIVE BARRIERS AND SOLUTIONS, WE ARE AT THE FOREFRONT OF INNOVATION, PROTECTING WORKPLACES AROUND THE WORLD. OUR COMMITMENT TO EXCELLENCE AND UNWAVERING DEDICATION TO ADVANCING SAFETY STANDARDS HAS PROPELLED US TO THE TOP OF THE INDUSTRY.

